




PRODUCT TYPE A8CM

Single Compression Gland Designed for use with Armoured and Unarmoured Flat Cable and featuring a Male Conduit Connection

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : Class I Div 2 : AEx e : AEx ta

PART NUMBERS:

A	8	CM	B	F
			S	

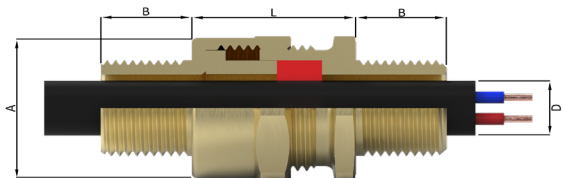

PRODUCT DESCRIPTION

"A8CM" type glands are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. Developed for flat cables, they provide controlled Ex db, IP sealing and have been tested to IP66 and IP68 to 50 metres. The "A8CM" version is designed to accommodate unarmoured and armoured cables where sealing and retention is required only on the outer sheath and additionally provides a male thread for the connection of conduit.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31 & IEC 60529
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7 & ISA 60079-31

EXAMPLE PART NUMBERING:
A8CM8F20/NP/20/M20

A	Gland designed for use with Unarmoured Cables
8	Silicone Seal for Flat Cables
CM	Male Conduit Connection Thread
B	Brass (B) / Stainless Steel (S)
F	Multiple Certification
M20	M20 x 1.5 Male Conduit Connection Thread
L	Locknut (material dictated by gland entry thread material)
N	Including IP Washer, Nylon (N) - Fibre (V) - PTFE (H)
T	Including Earth Tag
S	Including Serrated Washer
1	Quantity per kit
NP	Nickel Plated
20	Gland shell size
M20	M20 x 1.5 Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)

IP RATING:	IP66 & IP68 (50 metres - 7 Days), Type 4X
OPERATING TEMP:	Silicone Seals -60°C to +180°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland Size	Entry Thread Size		Metric Thread Length [B]	Connection Thread Options		Cable Outer Sheath [D]				Nominal Protrusion Length [L]	Dimensions/Weight (Metric Versions)		
	Metric	NPT		Metric	NPT	Width		Thickness			Across Flats [A]	Across Corners	Weight (Kgs)
20S	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	6.3	11.7	4.0	7.0	31	30.0	33.0	0.132
20R	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	8.1	13.5	5.8	6.2	32	30.0	33.0	0.133
20	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	10.3	13.5	5.6	9.0	31	30.0	33.0	0.132
**25	M25 x 1.5	3/4" or 1"	16	M25 x 1.5	3/4" or 1"	10.6	16.2	4.0	7.0	31	37.6	41.4	0.280

CERTIFICATION:

ATEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIC Da II 3G Ex nR IIC Gc
IECEX	Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da
NEC - USA	Class II Division 1, Groups E, F & G (except size 25) Class I Zone 1 AEx e IIC Gb Class II Zone 20 AEx ta IIIC Da Class III, Enclosure Type 4X
EAC	1Ex d IIC Gb X / 1Ex e IIC Gb X / 2Ex nR IIC Gc X / Ex ta IIIC Da X
INMETRO - Brazil	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
SAC - China	Ex d IIC Gb / Ex e IIC Gb
UKRAINE	II 2G Ex db IIC Gb / II 2 Ex eb IIC Gb / II 3G Ex nR IIC Gc / II 1D Ex ta IIIC Da
CcCoE	Ex d IIC Gb (Zone 1) Ex e IIC Gb (Zone 2) Ex nR IIC Gc (Zone 2)
ABS	Specified ABS Rules
LLOYD'S	Ex d IIC Gb / Ex e IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
RMRS	Ex d IC / Ex d IIC / Ex e IC / Ex e IIC / Ex ta IIIC

CERTIFICATION No:

ATEX	SIRA 01ATEX1270X & SIRA 09ATEX1221X
IECEX	IECEX SIR 05.0020X
NEC - USA	CSA 2627370
EAC	RU C-GB.BH02.B.00693-18
INMETRO - Brazil	NCC 13.2187 X
SAC - China	NEPSI GYJ16.1398X
UKRAINE	CUJ 18.0321 X
CcCoE - India	PESO P365300/2 & P365300/6
ABS	14-LD463991-1-PDA
LLOYD'S	10/00056(E1)
RMRS	14.02755.315

NOTES

- ** Size 25mm is only currently ATEX, IECEX, INMETRO, EAC and Ukraine certified.
- Gland size does not necessarily equate to the entry thread size.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the available machining techniques and will not have a full form thread for the entire length.

- Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to ATEX, IECEX and CSA is required, this must be clearly requested at time of enquiry / order.