




PRODUCT TYPE C

Single Compression Gland for Armoured Cable featuring Dedicated Armour Clamping

IEC 62444 : EN 62444 : BS 6121 : IP66

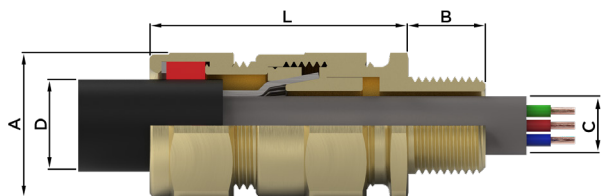

PART NUMBERS:

C	1	W	B	*
	3	X	S	R
			A	

PRODUCT DESCRIPTION

"C" type single compression glands provide a controlled IP and environmental seal on the outer sheath and a detachable armour specific clamping system for wire (W), braid/tape (X) armoured cables. The gland has been tested to IP66 and options are available for use with LSOH cables and extreme temperature applications.

COMPLIANCE STANDARDS:

IEC 62444
EN 62444
BS 6121

CERTIFICATION:

ABS Specified ABS Rules

CERTIFICATE NO.

ABS 14-LD463991-1-PDA

EXAMPLE PART NUMBERING:
C1W3B1R1C1K-V-H1S11NP20050NPT

C	Gland featuring armour specific clamping
1	Neoprene Seals (1) - Silicone Seals (3)
W	SWA (W) / SWB or STA (X)
B	Aluminium (A) / Brass (B) / Stainless Steel (S)
R	Reduced Bore Seal
C	PVC Shroud (C) - PCP Shroud (P) - LSOH Silicone Shroud (3)
K-V-H	Locknut, Earth Tag & Nylon (K), Fibre (V) or PTFE (H) IP Washer
S	Including Serrated Washer
1	Quantity per kit
NP	Nickel Plated
20	Gland shell size
050NPT	1/2"NPT Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / St Steel (ACSLN) / Aluminium (ACALN)
EARTH TAG	Brass (ACBET) / St Steel (ACSET) / Aluminium (ACALN)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)
SHROUDS	PVC (ACSPVC) / PCP (ACSPCP) / LSOH Silicone (ACSSIO)
IP RATING:	IP66
OPERATING TEMP:	Neoprene Seals -35°C to +90°C Silicone Seals -60°C to +180°C
MATERIALS:	Aluminium, Brass or Stainless Steel
PLATING:	Electroless Nickel

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland Size	Entry Thread Size		Metric Thread Length [B]	Cable Acceptance Details						Armour Acceptance Range		Nominal Protrusion Length [L]	Dimensions/Weight (Metric)			Shroud Size (Metric)
	Metric	NPT		Inner Sheath [C]		Outer Sheath [D]		Reduced [D]		W	X		Across Flats [A]	Across Corners	Weight (Kgs)	
				Min	Max	Min	Max	Min	Max							
16	M16 x 1.5	1/2" or 3/4"	16	N/A	8.4	8.4	13.5	4.9	10.3	0.90	0.15-0.35	58	24.0	26.5	0.143	L24
16	M20 x 1.5	1/2" or 3/4"	16	N/A	8.4	8.4	13.5	4.9	10.3	0.90	0.15-0.35	58	24.0	26.5	0.154	L24
20S	M20 x 1.5	1/2" or 3/4"	16	N/A	11.7	11.5	16.0	9.4	12.5	0.90-1.25	0.15-0.35	58	24.0	26.5	0.125	L24
20	M20 x 1.5	1/2" or 3/4"	16	N/A	14.0	15.5	21.1	12.0	17.6	0.90-1.25	0.15-0.50	58	30.0	33.0	0.180	L30
25	M25 x 1.5	3/4" or 1"	16	N/A	20.0	20.3	27.4	16.8	23.9	1.25-1.60	0.15-0.50	58	37.6	41.4	0.256	L38
32	M32 x 1.5	1" or 1 1/4"	16	N/A	26.3	26.7	34.0	23.2	30.5	1.60-2.00	0.15-0.55	65	46.0	50.6	0.400	L46
40	M40 x 1.5	1 1/4" or 1 1/2"	16	N/A	32.2	33.0	40.6	28.6	36.2	1.60-2.00	0.20-0.60	72	55.0	60.5	0.649	L55
50S	M50 x 1.5	1 1/2" or 2"	16	N/A	38.2	39.4	46.7	34.8	42.4	2.00-2.50	0.20-0.60	73	65.0	71.5	0.940	L65
50H	M50 x 1.5	1 1/2" or 2"	16	N/A	38.2	45.7	53.2	41.1	48.5	2.00-2.50	0.30-0.80	73	65.0	71.5	0.849	L65
50	M50 x 1.5	2"	16	N/A	44.1	45.7	53.2	41.1	48.5	2.00-2.50	0.30-0.80	73	65.0	71.5	0.707	L65
63S	M63 x 1.5	2" or 2 1/2"	19	N/A	50.1	52.1	59.5	47.5	54.8	2.50	0.30-0.80	76	80.0	88.0	1.369	L80
63H	M63 x 1.5	2" or 2 1/2"	19	N/A	50.1	58.4	68.5	53.8	61.2	2.50	0.30-0.80	76	80.0	88.0	1.306	L80
63	M63 x 1.5	2 1/2"	19	N/A	56.0	58.4	68.5	53.8	61.2	2.50	0.30-0.80	76	80.0	88.0	1.123	L80
75S	M75 x 1.5	2 1/2" or 3"	19	N/A	62.0	64.8	72.2	60.2	68.0	2.50	0.30-1.00	82	90.0	99.0	1.661	L90
75H	M75 x 1.5	2 1/2" or 3"	19	N/A	62.0	71.1	78.0	66.5	73.4	2.50	0.30-1.00	82	90.0	99.0	1.553	L90
75	M75 x 1.5	3"	19	N/A	68.0	71.1	78.0	66.5	73.4	2.50	0.30-1.00	82	90.0	99.0	1.310	L90
80	M80 x 2.0	3" or 3 1/2"	25	N/A	72.0	77.0	84.0	71.9	79.4	3.15	0.45-1.00	110	104.0	115.2	2.718	L104
80H	M80 x 2.0	3" or 3 1/2"	25	N/A	72.0	79.6	90.0	75.0	85.4	3.15	0.45-1.00	110	104.0	115.2	2.489	L104
85	M85 x 2.0	3" or 3 1/2"	25	N/A	78.0	79.6	90.0	75.0	85.4	3.15	0.45-1.00	110	104.0	115.2	2.326	L104
90	M90 x 2.0	3 1/2" or 4"	25	N/A	84.0	88.0	96.0	82.0	91.4	3.15	0.45-1.00	110	114.0	125.7	2.852	L114
90H	M90 x 2.0	3 1/2" or 4"	25	N/A	84.0	92.0	102.0	87.4	97.4	3.15	0.45-1.00	110	114.0	125.7	2.629	L114
100	M100 x 2.0	3 1/2" or 4"	25	N/A	90.0	92.0	102.0	87.4	97.4	3.15	0.45-1.00	110	114.0	125.7	2.496	L114
110	M110 x 2.0	-	25	N/A	102.0	110.0	117.0	N/A	N/A	3.15	0.45-1.00	170	135.0	148.0	4.190	N/A
120	M120 x 2.0	-	25	N/A	112.0	120.0	127.0	N/A	N/A	3.15	0.45-1.00	170	145.0	149.0	5.750	N/A
130	M130 x 2.0	-	25	N/A	122.0	130.0	137.0	N/A	N/A	3.15	0.45-1.00	170	155.0	170.0	6.900	N/A

NOTES

- Gland size does not necessarily equate to the entry thread size.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the available machining techniques and will not have a full form thread for the entire length.

Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.

- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.