



PRODUCT SPECIFICATIONS

Terminator™ ZT

PIPEWALL SENSING THERMOSTATS

APPLICATION . . .

Electric Heat Tracing Control

The ZT is designed for use as an adjustable control thermostat for freeze protection and temperature maintenance applications requiring tankwall or pipewall sensing. The ZT is available in four temperature control and bulb exposure temperature ranges and has a flexible capillary armoring complete with capillary gland and insulation entry device. The ZT includes an expediter to facilitate attaching the thermostat directly on the pipe and permits two heating cables to enter and be connected within the enclosure.

Terminator ZT kit is approved for use in ordinary (nonclassified) and hazardous (classified) area's.

RATINGS/SPECIFICATIONS . . .

Enclosure rating.....	IP66
Maximum pipe exposure temperature.....	250°C
Minimum installation temperature.....	-60°C
Operating ambient temperature	
-60°C ≤ Ta ≤ +55°C	16 Amps Max, T6 85°C
-60°C ≤ Ta ≤ +50°C	25 Amps Max, T5 100°C
Voltage rating.....	230 Vac nominal up to 253 Vac ¹
Switch rating	25 A (Ohmic, NC contact)
Switch type	Controller
Electrical connection ²	Terminal block ³
Adjustable control range ⁴	
ZT-C-100	0°C to 100°C
ZT-C-200	0°C to 200°C
ZT-C-300	0°C to 300°C
ZT-C-500	20°C to 500°C
Maximum control differential/accuracy	
ZT-C-100	7% / -1 K to +7 K
ZT-C-200	2.5% / -2 K to +10 K
ZT-C-300	2.5% / -2 K to +16 K
ZT-C-500	2.5% / -2 K to +28 K
Maximum bulb exposure temperature	
ZT-C-100	230°C
ZT-C-200	230°C
ZT-C-300	345°C
ZT-C-500	530°C
Bulb dimensions/material/capillary length	
ZT-C-100	6 x 76 mm/stainless steel/1 m
ZT-C-200	6 x 76 mm/stainless steel/1 m
ZT-C-300	6 x 55 mm/stainless steel/1 m
ZT-C-500	6 x 280 mm/stainless steel/1 m
Max. electrical switching frequency.....	180 cycles/hour
Electrical durability operating cycles.....min.	100.000 cycles
Mechanical durability operating cycles....min.	300.000 cycles

Notes . . .

- 400 Vac/16A version available on request.
- Thermostats are shipped with an M25 dust cap that can be replaced with an Ex e approved gland to permit power or heating cable connection.
- Terminal block consists of six line/load terminals and two PE terminals.
- The 300°C and 500°C thermostats are only available in wall mount bracket.



CONSTRUCTION . . .


- Junction Box, Glass-Reinforced Polymer with DIN Rail Mounted Terminal Blocks
- Pipe-Mount Expediter, Glass-Reinforced Polymer
- Capillary Temperature Sensor

CERTIFICATIONS/APPROVALS . . .

II 2 G Ex db eb IIC T5-T6 FM10ATEX0058X
 II 2 D Ex tb IIIC T100°C-T85°C

 International Electrotechnical Commission
 IEC Certification Scheme for Explosive Atmospheres
 FMG 10.0022X

TYPICAL WIRING DIAGRAM . . .

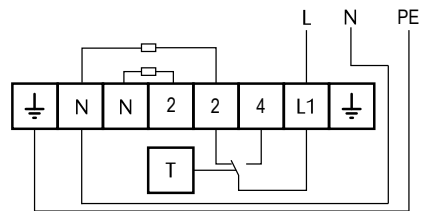

PRODUCT REFERENCE LEGEND . . .

ZT-C-100-P	
Area Designation Z = Zone Areas	Cable Profile P = RSX, TSX, VSX, BSX, HTSX, KSX, FP, HPT MI = MIS, MIQ M = TEK, HTEK
Kit Type T = Thermostat	Control Range 100 = 0°C to 100°C 200 = 0°C to 200°C 300 = 0°C to 300°C 500 = 20°C to 500°C
Switch Type C = Controller	

THERMON The Heat Tracing Specialists®



European Headquarters: Boezenweg 25 • PO Box 205 • 2640 AE Pijnacker • The Netherlands • Phone: +31 (0) 15-36 15 37
 Corporate Headquarters: 100 Thermon Dr • PO Box 609 San Marcos, • TX 78667-0609 • Phone: 512-396-5801 • 1-800-820-4328
 For the Thermon office nearest you visit us at . . . www.thermon.com